
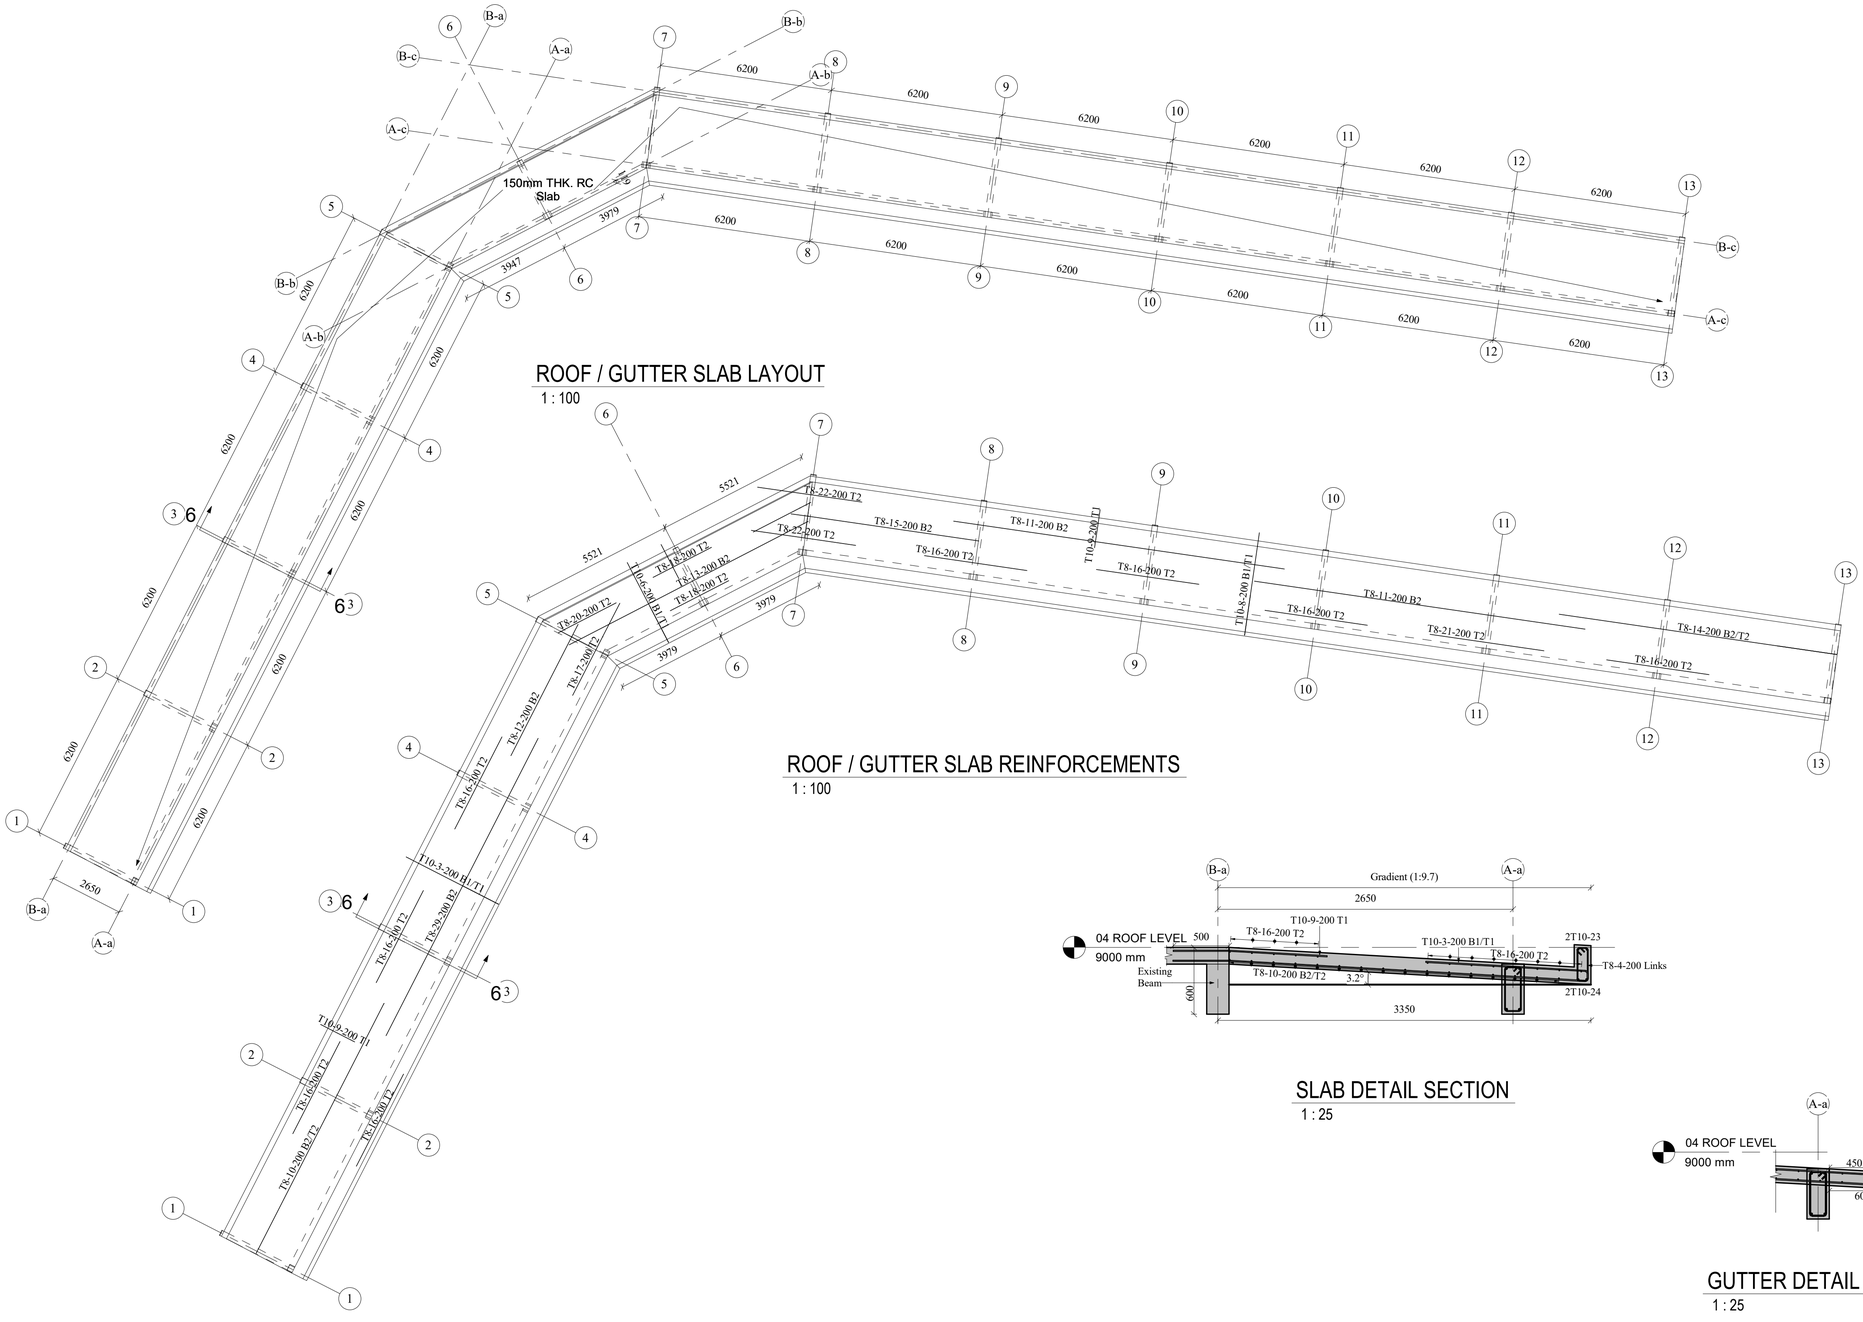


ROOF / GUTTER SLAB LAYOUT
1 : 100

ROOF / GUTTER SLAB REINFORCEMENTS
1 : 100

SLAB DETAIL SECTION
1 : 25

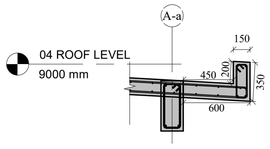

GUTTER DETAIL SECTION
1 : 25

GENERAL STRUCTURAL NOTES

1. All dimensions in millimeters
2. Figured dimensions to be taken from the drawing. Do not scale.
3. All structural drawings are to be read in conjunction with their relevant counterparts, including but not limited to architectural, mechanical, electrical and plumbing drawings. Any discrepancy to be reported to the Engineer immediately.
4. All excavations are to be approved by the Civil and Structural Engineer(s).
5. Concrete to be class C20/25 with a minimum cube crushing strength of 18N/mm^2 and 25N/mm^ at 7 days and 28 days respectively.
6. Blinding concrete to be class C15 with a minimum crushing strength of 15N/mm^2 at 28 days.
7. The minimum cover to reinforcement:
   - Foundations : 50mm
   - Columns : 40mm
   - Beams : 25mm
   - Slabs : 25mm
8. Hoop Iron to be placed on every other course of masonry walls and bonded to the reinforced concrete columns
9. All reinforcement works are to be approved by the Structural Engineer prior to concreting.
10. Minimum spacing between longitudinal bars not less than 25mm
11. Minimum spacing between transverse bars not less than 150mm c/c
12. All segment lengths to be rounded up by 5mm and all cutting lengths to be rounded up by 25mm
13. Reinforcement lap lengths to be 50 x Diameter of the smaller lapped bar
14. Foundation to be laid on the Firm bearing strata or Approved Compacted material
15. Compaction is to be done in layers not exceeding 150mm in thickness.

General Abbreviations as follows:
1. T - Top Bar
2. B - Bottom Bar
3. T1 - Main Top Bar
4. T2 - Distribution Top Bar
5. B1 - Main Bottom Bar
6. B2 - Distribution Bottom Bar
7. N.F - Near Face
8. F.F - Far Face
9. A/W - Alternating With
10. E.W. - Each Way

Revision	Description	Date
1.	Slab,Gutter and Column Details	29/04/2026

CLIENT: BAOBAB BEACH RESORT


PROJECT: PROPOSED ROOMS AND PUBLIC AREA RENOVATIONS AT BAOBAB BEACH RESORT

ARCHITECT: DMS ARCHITECTURE

TITLE: MARIDADI BLOCK A
ROOF AND GUTTER SLAB AND REINFORCEMENT DETAILS LAYOUT


DMS ENGINEERING

JOB No. 03	
DRG No. DMS-026-003/STR/01	
Project Date: APRIL 2026	
Sheet Issue Date: 30/05/26	
DESIGNED V.N.M	CHECKED BY: ENG. L.O
DRAWN BY V.N.M	SCALE: As indicated

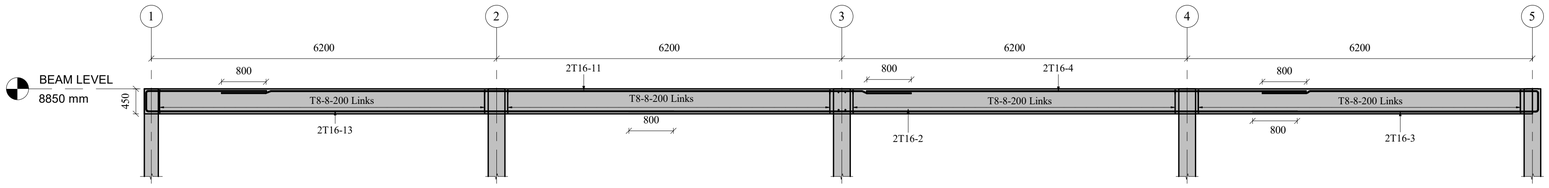

BEAM 02 (450 X 200MM)

1 : 50




BEAM 02 SECTION

1 : 50

GENERAL STRUCTURAL NOTES


1. All dimensions in millimeters
2. Figured dimensions to be taken from the drawing. Do not scale.
3. All structural drawings are to be read in conjunction with their relevant counterparts, including but not limited to architectural, mechanical, electrical and plumbing drawings. Any discrepancy to be reported to the Engineer immediately.
4. All excavations are to be approved by the Civil and Structural Engineer(s).
5. Concrete to be class C20/25 with a minimum cube crushing strength of 18N/mm^2 and 25N/mm^ at 7 days and 28 days respectively.
6. Blinding concrete to be class C15 with a minimum crushing strength of 15N/mm^2 at 28 days.
7. The minimum cover to reinforcement:
   - Foundations : 50mm
   - Columns : 40mm
   - Beams : 25mm
   - Slabs : 25mm
8. Hoop Iron to be placed on every other course of masonry walls and bonded to the reinforced concrete columns
9. All reinforcement works are to be approved by the Structural Engineer prior to concreting.
10. Minimum spacing between longitudinal bars not less than 25mm
11. Minimum spacing between transverse bars not less than 150mm c/c
12. All segment lengths to be rounded up by 5mm and all cutting lengths to be rounded up by 25mm
13. Reinforcement lap lengths to be 50 x Diameter of the smaller lapped bar
14. Foundation to be laid on the Firm bearing strata or Approved Compacted material
15. Compaction is to be done in layers not exceeding 150mm in thickness.

General Abbreviations as follows:
1. T - Top Bar
2. B - Bottom Bar
3. T1 - Main Top Bar
4. T2 - Distribution Top Bar
5. B1 - Main Bottom Bar
6. B2 - Distribution Bottom Bar
7. N.F - Near Face
8. F.F - Far Face
9. A/W - Alternating With
10. E.W. - Each Way

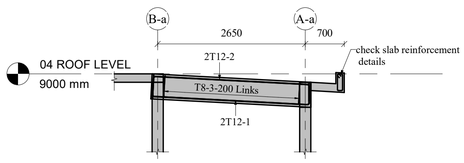


BEAM 01 (450 X200MM)


1 : 50



BEAM 01 SECTION


1 : 50

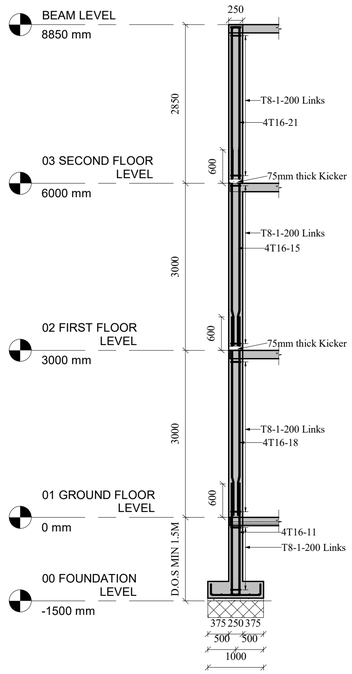




SECTION 01-01

1 : 25

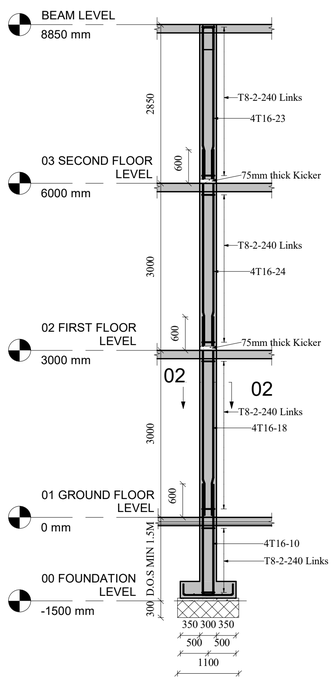



SECTION 02-02

1 : 25

COLUMN C1 (200 X 250 MM)

1 : 50

COLUMN C2 (200 X 300 MM)

1 : 50

Revision	Description	Date
1.	Slab,Gutter and Column Details	29/04/2026

CLIENT

BAOBAB BEACH RESORT

PROJECT

PROPOSED ROOMS AND PUBLIC AREA RENOVATIONS AT BAOBAB BEACH RESORT

ARCHITECT

DMS ARCHITECTURE


TITLE

MARIDADI BLOCK A

BEAM LAYOUT, BEAM SECTION, COLUMN SECTIONS


DMS ENGINEERING

JOB No.	03
DRG No.	DMS-026-003/STR/02
Project Date:	APRIL 2026
Sheet Issue Date:	30/05/26
DESIGNED V.N.M	CHECKED BY: ENG. L.O
DRAWN BY V.N.M	SCALE: As indicated

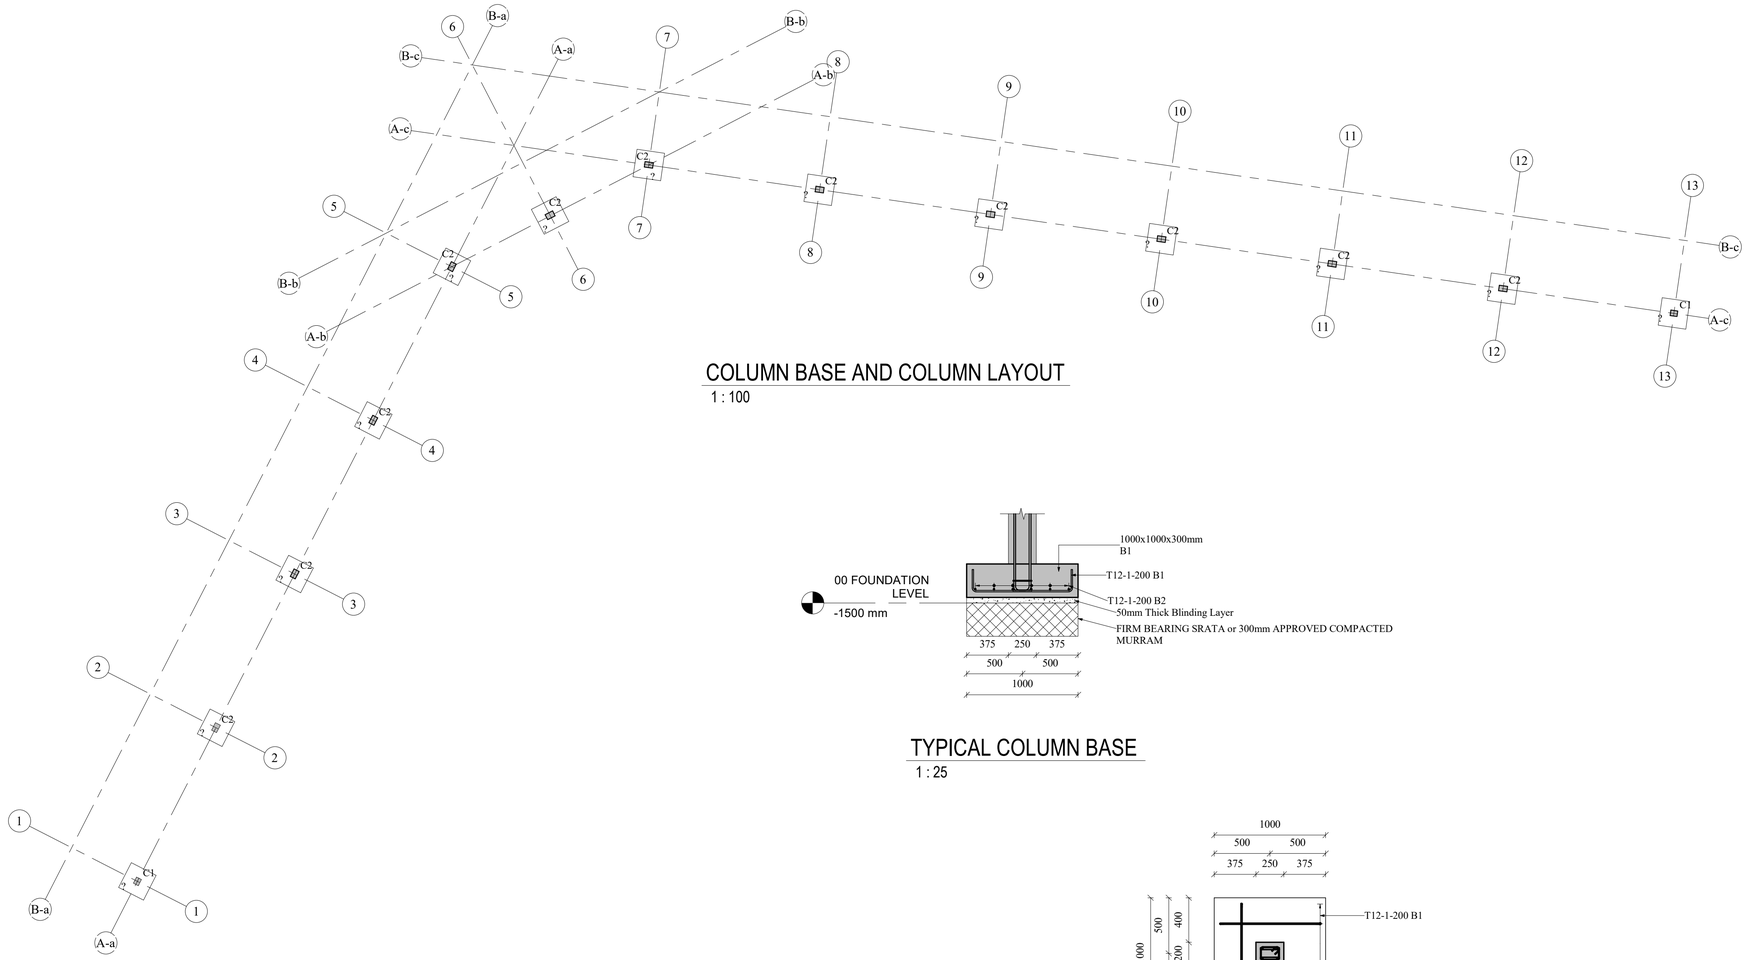

COLUMN BASE AND COLUMN LAYOUT
1 : 100

TYPICAL COLUMN BASE
1 : 25

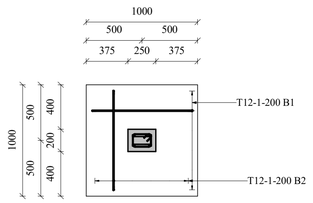

COLUMN BASE PLAN
1 : 25

GENERAL STRUCTURAL NOTES

1. All dimensions in millimeters
2. Figured dimensions to be taken from the drawing. Do not scale.
3. All structural drawings are to be read in conjunction with their relevant counterparts, including but not limited to architectural, mechanical, electrical and plumbing drawings. Any discrepancy to be reported to the Engineer immediately.
4. All excavations are to be approved by the Civil and Structural Engineer(s).
5. Concrete to be class C20/25 with a minimum cube crushing strength of 18N/mm^2 and 25N/mm^ at 7 days and 28 days respectively.
6. Blinding concrete to be class C15 with a minimum crushing strength of 15N/mm^2 at 28 days.
7. The minimum cover to reinforcement:
   - Foundations : 50mm
   - Columns : 40mm
   - Beams : 25mm
   - Slabs : 25mm
8. Hoop Iron to be placed on every other course of masonry walls and bonded to the reinforced concrete columns
9. All reinforcement works are to be approved by the Structural Engineer prior to concreting.
10. Minimum spacing between longitudinal bars not less than 25mm
11. Minimum spacing between transverse bars not less than 150mm c/c
12. All segment lengths to be rounded up by 5mm and all cutting lengths to be rounded up by 25mm
13. Reinforcement lap lengths to be 50 x Diameter of the smaller lapped bar
14. Foundation to be laid on the Firm bearing strata or Approved Compacted material
15. Compaction is to be done in layers not exceeding 150mm in thickness.

General Abbreviations as follows:
1. T - Top Bar
2. B - Bottom Bar
3. T1 - Main Top Bar
4. T2 - Distribution Top Bar
5. B1 - Main Bottom Bar
6. B2 - Distribution Bottom Bar
7. N.F - Near Face
8. F.F - Far Face
9. A/W - Alternating With
10. E.W. - Each Way

Revision	Description	Date
1.	Slab,Gutter and Column Details	29/04/2026

CLIENT
BAOBAB BEACH RESORT

PROJECT
PROPOSED ROOMS AND PUBLIC AREA RENOVATIONS AT BAOBAB BEACH RESORT

ARCHITECT
DMS ARCHITECTURE

TITLE
MARIDADI BLOCK A
COLUMN DETAILS LAYOUT AND COLUMN BASE DETAILS

DMS ENGINEERING

JOB No.	03
DRG No.	DMS-026-003/STR/03
Project Date:	APRIL 2026
Sheet Issue Date:	30/05/26
DESIGNED V.N.M	CHECKED BY: ENG. L.O
DRAWN BY V.N.M	SCALE: As indicated