
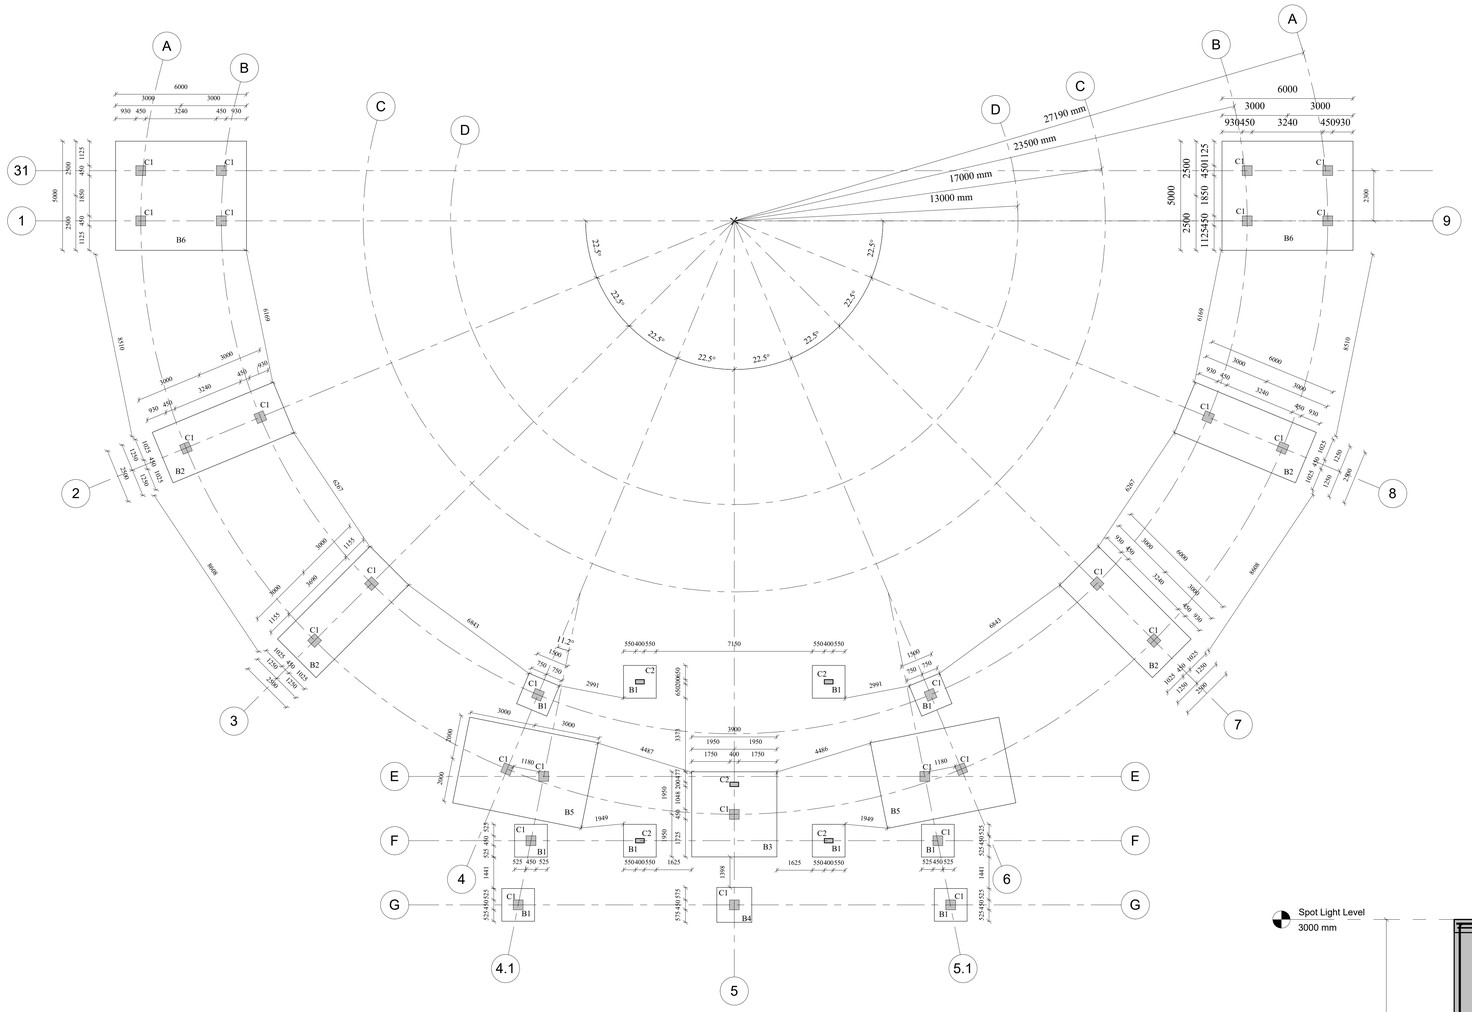



FOUNDATION LEVEL LAYOUT

1 : 100

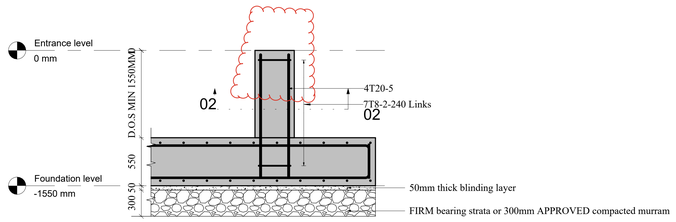


TYPICAL COLUMN C1

1 : 25




SECTION 02-02

1 : 25

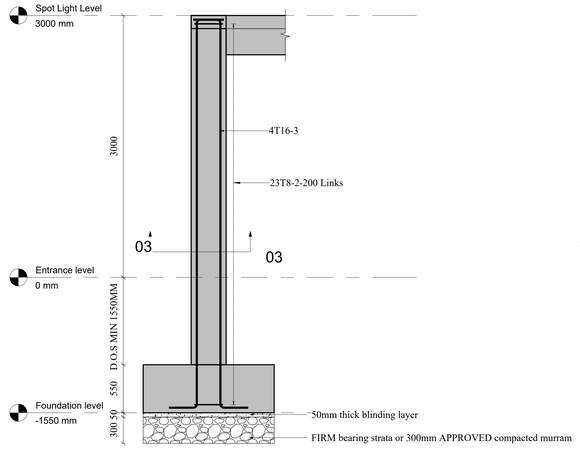

COLUMN C2

1 : 25



SECTION 03-03

1 : 20

GENERAL STRUCTURAL NOTES

1. All dimensions in millimeters.
2. Figured dimensions to be taken from the drawing. Do not scale.
3. All structural drawings are to be read in conjunction with their relevant counterparts, including but not limited to architectural, mechanical, electrical and plumbing drawings. Any discrepancy to be reported to the Engineer immediately.
4. All excavations are to be approved by the Civil and Structural Engineer(s).
5. Concrete to be class C20/25 with a minimum cube crushing strength of 18N/mm^2 and 25N/mm^2 at 7 days and 28 days respectively.
6. Blinding concrete to be class C15 with a minimum crushing strength of 15N/mm^2 at 28 days.
7. The minimum cover to reinforcement:
- Foundations : 50mm
- Columns : 40mm
- Beams : 25mm
- Slabs : 25mm
8. Hoop Iron to be placed on every other course of masonry walls and bonded to the reinforced concrete columns
9. All reinforcement works to be inspected and approved by the Engineer before concreting
10. Minimum spacing between longitudinal bars not less than 25mm
11. Minimum spacing between transverse bars not less than 150mm c/c
12. All segment lengths to be rounded up by 5mm and all cutting lengths to be rounded up by 25mm
13. Reinforcement lap lengths to be 50 x Diameter of the smaller lapped bar
14. Masonry crushing strength to be 7 N/mm^2
15. Compaction is to be done in layers not exceeding 150mm in thickness.

General Abbreviations as follows:
1. T - Top Bar
2. B - Bottom Bar
3. T1 - Main Top Bar
4. T2 - Distribution Top Bar
5. B1 - Main Bottom Bar
6. B2 - Distribution Bottom Bar
7. N:F - Near Face
8. F.F - Far Face
9. A/W - Alternating With
10. E.W. - Each Way

Revision	Description	Date

CLIENT: BAOBAB BEACH RESORT


PROJECT: PROPOSED PORINI AMPHITHEATER

ARCHITECT: DMS ARCHITECTURE


TITLE: FOUNDATION LEVEL LAYOUT AND COLUMN REINFORCEMENT DETAILS OF PORINI AMPHITHEATER

DMS ENGINEERING


JOB No.	01
DRG No.	DMS-026-003/STR/00
Project Date:	JULY 2026
Sheet Issue Date:	30/07/2026
DESIGNED V.N.M	CHECKED BY: ENG. L.O
DRAWN BY V.N.M	SCALE: As indicated

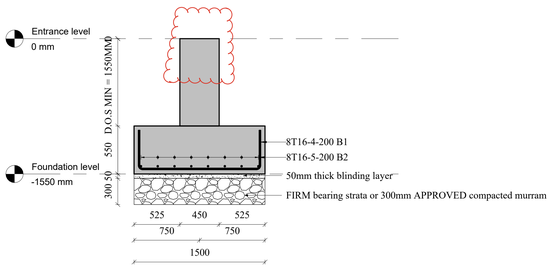


COLUMN BASE B1
1 : 25




COLUMN BASE B1 PLAN
1 : 50

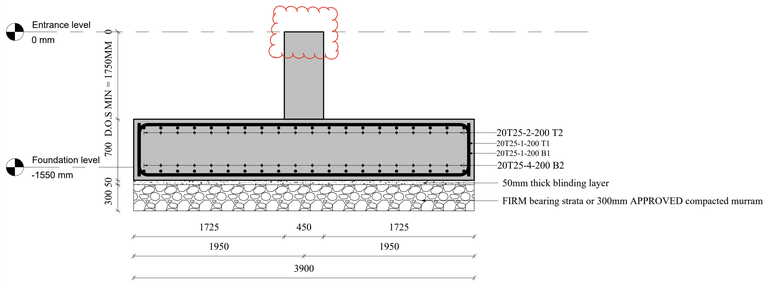


COLUMN BASE B3
1 : 25

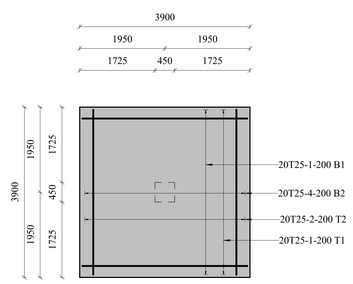

COLUMN BASE B3 PLAN
1 : 50

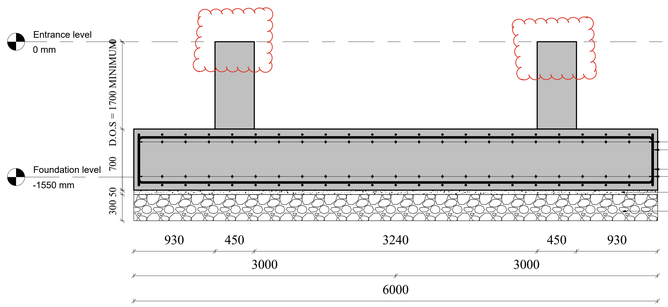

COLUMN BASE B2
1 : 25

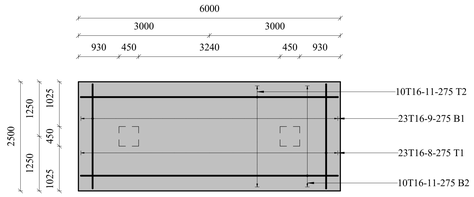


COLUMN BASE B2 PLAN
1 : 50


GENERAL STRUCTURAL NOTES

1. All dimensions in millimeters.
2. Figured dimensions to be taken from the drawing. Do not scale.
3. All structural drawings are to be read in conjunction with their relevant counterparts, including but not limited to architectural, mechanical, electrical and plumbing drawings. Any discrepancy to be reported to the Engineer immediately.
4. All excavations are to be approved by the Civil and Structural Engineer(s).
5. Concrete to be class C20/25 with a minimum cube crushing strength of 18N/mm^2 and 25N/mm^2 at 7 days and 28 days respectively.
6. Blinding concrete to be class C15 with a minimum crushing strength of 15N/mm^2 at 28 days.
7. The minimum cover to reinforcement:
- Foundations : 50mm
- Columns : 40mm
- Beams : 25mm
- Slabs : 25mm
8. Hoop Iron to be placed on every other course of masonry walls and bonded to the reinforced concrete columns
9. All reinforcement works to be inspected and approved by the Engineer before concreting
10. Minimum spacing between longitudinal bars not less than 25mm
11. Minimum spacing between transverse bars not less than 150mm c/c
12. All segment lengths to be rounded up by 5mm and all cutting lengths to be rounded up by 25mm
13. Reinforcement lap lengths to be 50 x Diameter of the smaller lapped bar
14. Masonry crushing strength to be 7 N/mm^2
15. Compaction is to be done in layers not exceeding 150mm in thickness.


General Abbreviations as follows:
1. T - Top Bar
2. B - Bottom Bar
3. T1 - Main Top Bar
4. T2 - Distribution Top Bar
5. B1 - Main Bottom Bar
6. B2 - Distribution Bottom Bar
7. N:F - Near Face
8. F.F - Far Face
9. A/W - Alternating With
10. E.W. - Each Way

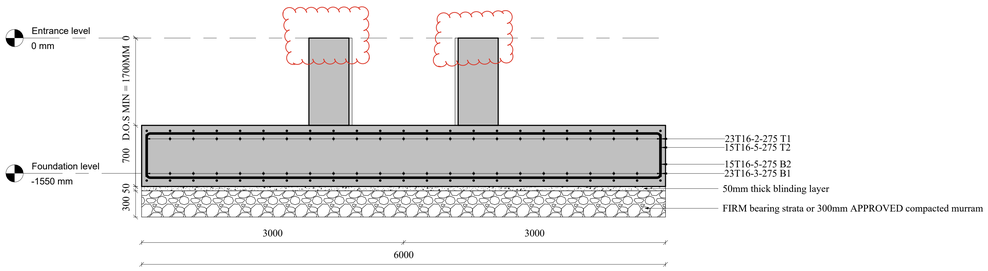


COLUMN BASE B5
1 : 25

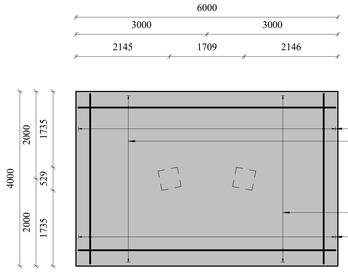


COLUMN BASE B5 PLAN
1 : 50

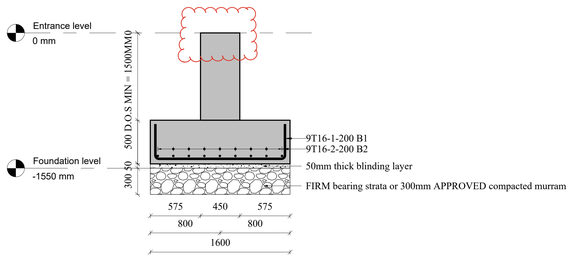


COLUMN BASE B4
1 : 25



COLUMN BASE B4 PLAN
1 : 50

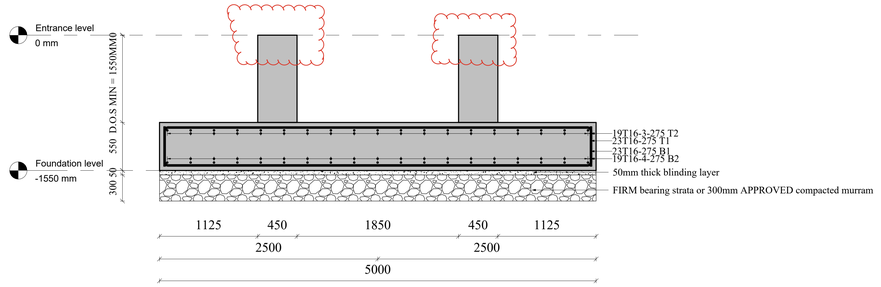

COLUMN C1 ON SUPPORT B2
1 : 25

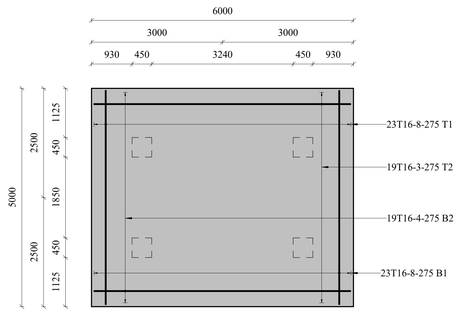

COLUMN BASE B6 PLAN
1 : 50

Revision	Description	Date

CLIENT: BAOBAB BEACH RESORT

PROJECT: PROPOSED PORINI AMPHITHEATER

ARCHITECT: DMS ARCHITECTURE

TITLE: COLUMN BASES OF PORINI AMPHITHEATER

DMS ENGINEERING

JOB No.	01
DRG No.	DMS-026-003/STR/01
Project Date:	JULY 2026
Sheet Issue Date:	30/07/2026
DESIGNED V.N.M	CHECKED BY: ENG. L.O
DRAWN BY V.N.M	SCALE: As indicated